


CHASSIS

B

GLG 425 SPN-3D

Very powerful
self-propelled all
adaptable glass
handler

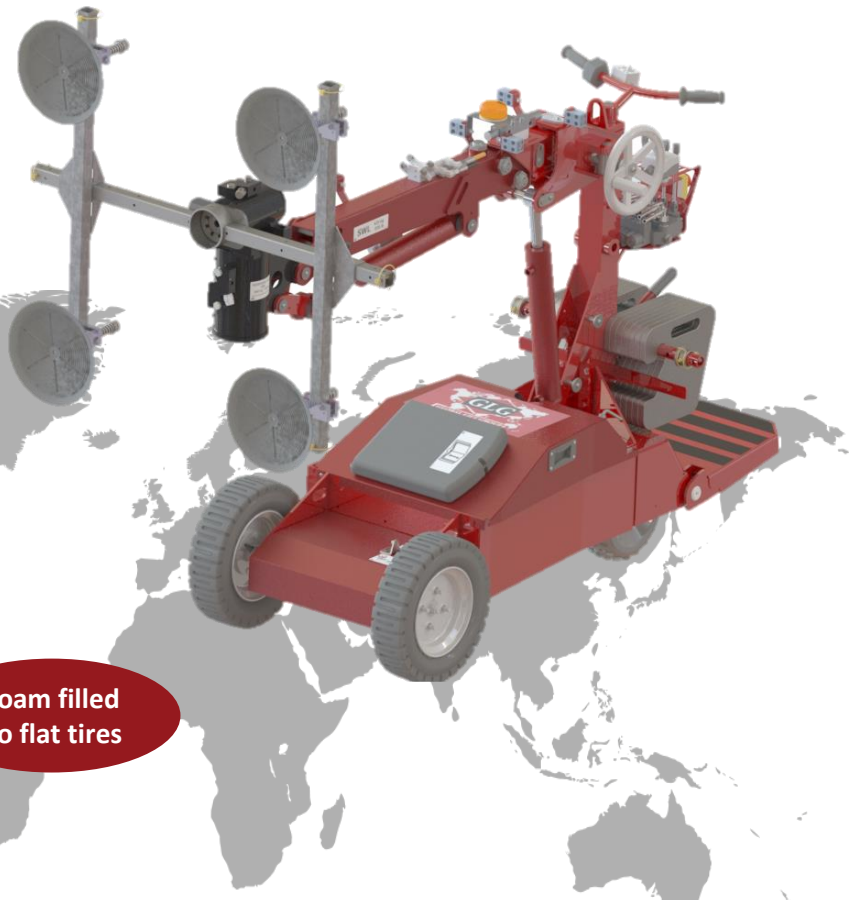

Foam filled
no flat tires

- Intelligent all adaptable glass handler for millimeter precise maneuverability of flat materials
- No Outriggers
- less floor space required
- Drives through narrow passages down to 75 cm /29,5"



GLG built-in vacuum system



± 90° turning and endless rotation of the center boom

SERVICE
24 HOUR
DELIVERY OF SPARE PARTS




We lift it up where it belongs!



Technical specifications

Description	EU	US
Loading capacity w. 22 counterw.	425 kg	937 lbs
Own weight with counterw.	767 kg	1684 lbs
Own weight without counterw.	536 kg	1175 lbs
Max lifting height	2909 mm	114"
Telescopic range	600 mm	24"
Sideshift	± 11 degrees	
Battery specifications		
Charging current	230V	115V
Battery pack (std.)	24V / 159Ah	

Lift accessories

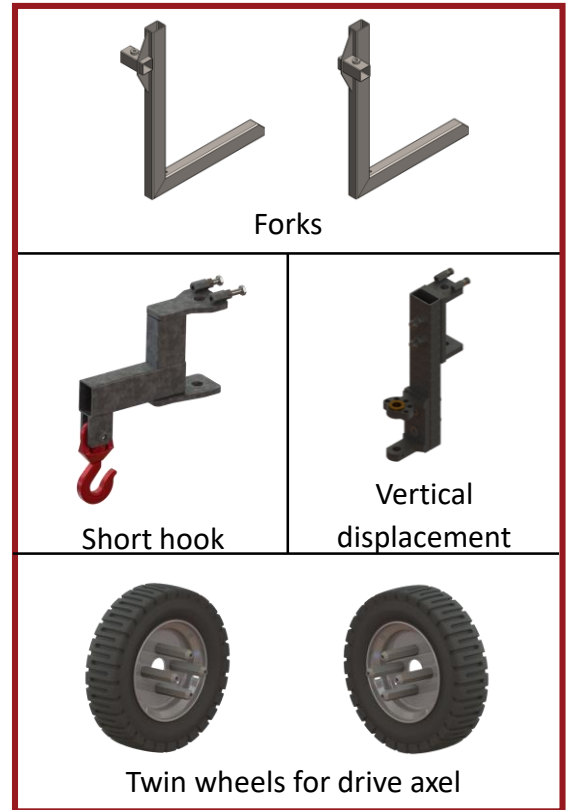

Measurements

Minimum

- Width: 750 mm
 - Without twin tires
- Height: 1333 mm
 - Transport position
- Length: 2000 mm
 - Transport position
- Lifting height: 0mm to 920 mm
 - Pick up from a table at



Maximum

- Width: 1082 mm
 - With twin tires
- Lifting height: 2558 mm
 - Mounting vertical
- Lifting height: 2909 mm
 - Mounting horizontal



Specifications Our machines comply with the requirements of Machinery Directive 2006/42/EC, and are ASME B30.5, 5-1.1, 5-1.10 Compliant, ASME B30.20 Compliant, SAE-J1063 Compliant, and SAE-J765 Compliant.

Other standards met include:
 DS/EN ISO 12100:2011 Safety of machinery – General principles for design
 DS/EN ISO 4413:2010 Hydraulic fluid power
 DS/EN 13155 + A2:2009 Cranes – Safety – Non-fixed load lifting attachment.

Much more information at www.GlobalLiftGroup.com

GLG Canada Ltd (North America)
 21332 Wilson Street, NOL 1E0
 Delaware, Ontario, Canada
 Phone: 1-855-779-3371

European Head Office
 Soendergaarden 28
 9640 Farsoe, Denmark
 Phone: +45 75 72 72 15



www.GlobalLiftGroup.com