







HOEFLON C6

Multifunctional, robust and very simple operation are words that characterize the compact C6 crane. It is a tough machine in the mini crane category. This crane is ideal for placing glass and accurately positioning steel beams.

It is the only compact crane which can lift more than its own weight. And that makes it possible for one crane to lower another into an underground space.









Specifications


- promise and a	
Capacity	3,150 kg
Max. outreach	13.7 m x 210 kg
Maximum hoisting height, incl. options	17 m
Dimensions L x W x H	2.9 m x 0.75 m x 1.82 m
Dimensions including winch and jib	3.14 m x 0.75 m x 1.95 m
Total weight	2,650 kg
Jib weight	150 kg
Hoisting winch weight	50 kg
Hoist block weight	33 kg
Winch	1000 kg, 2000 kg and 3,150 kg
Hoisting speed with winch	20.8 m/min
Winch cable	8 mm and 40 m
Boom system	Cylinder and chain system
Boom Angle	5 – 83 degrees
Rotation	360 degrees
Propulsion system	by remote control 1st gear: 1.1 km/h
	2nd gear: 2.2 km/h
Engine	Yanmar 3 cylinder, 1500 RPM
Incline angle	20 degrees
Ground pressure	0.79 kg/cm2

Accessories

Electric motor	230 V
Fly Jib	4.3 m
Hoisting winch	1000 kg, 2000 kg, 3,150 kg
Extension piece	30-degree adjustable
Levelling jacks	position measuring system for continuous rotating levelling jacks
Levelling jacks	hydraulically extending
Rotation	endless
Tracks	pick and carry
Tracks	non marking
Lighting	work light on boom and jib
Storage case	extra storage case
Actuator	900 to 1700 RPM






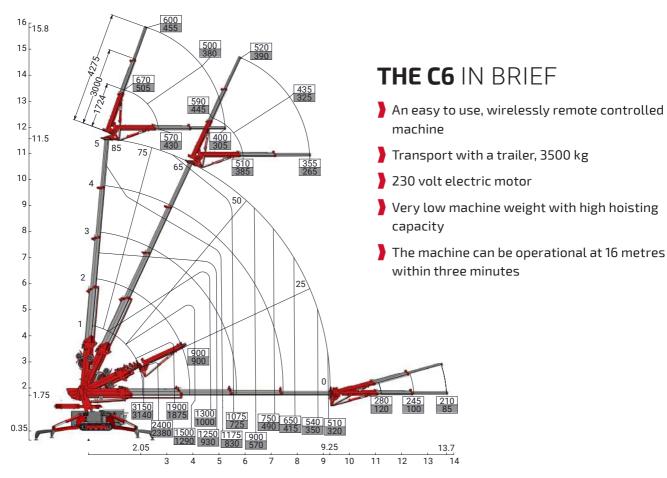

With fly-jib

No rights can be derived from the information stated here.

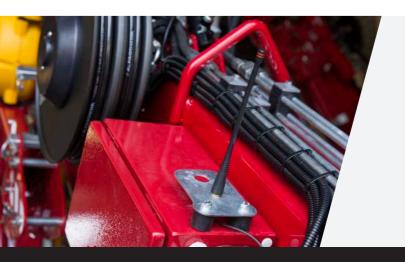

WHY HOEFLON?

Hoeflon compact cranes offer flexibility and optimal power. We offer a lot of possibilities and work out solutions with you.

HOEFLON

Hoeflon Compact Cranes B.V.

address: Bellstraat 21 I, 3771 AH Barneveld, the Netherlands
Tel: +31 (0)342 400288 email info@hoeflon.nl

HOEFLON.COM